


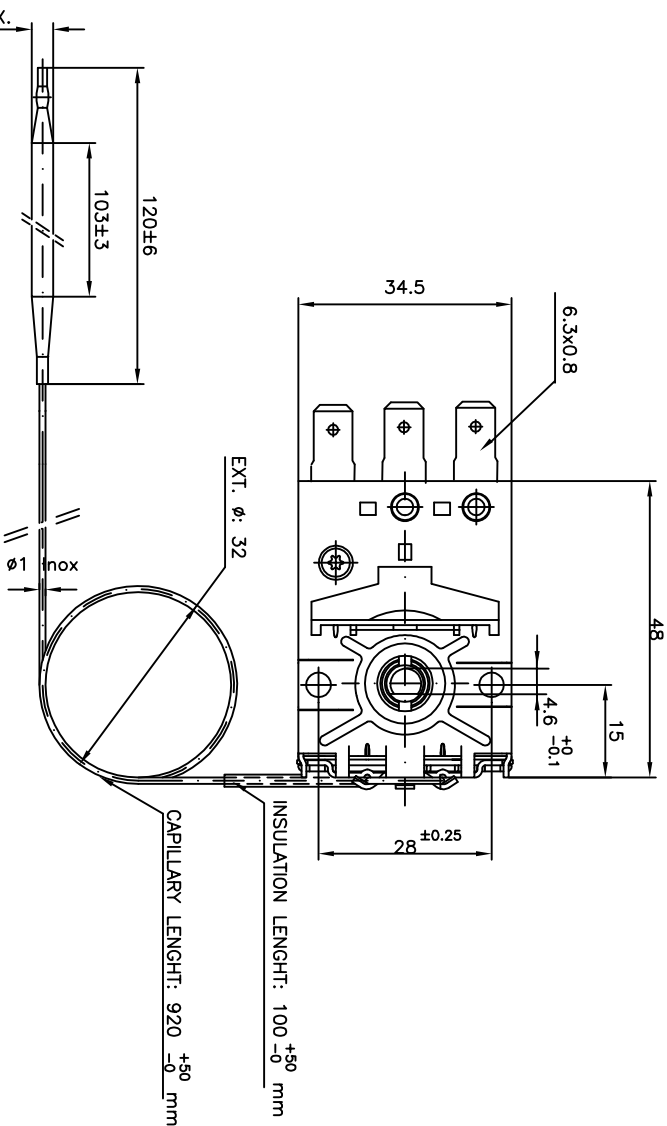


| DIFFERENTIAL | |
|-----------------------------|----------|
| MAX TEMPERATURE IN THE BOX | 7±3°C |
| MIN TEMPERATURE IN THE BULB | 150 °C |
| MAX TEMPERATURE IN THE BULB | -10 °C |
| DIELECTRIC RIGIDITY | 2000V 1s |

ELECTRIC DRAWING IN OFF POSTION

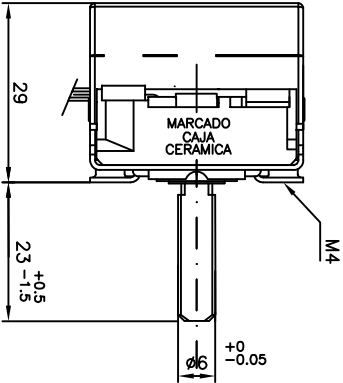


REGULATION

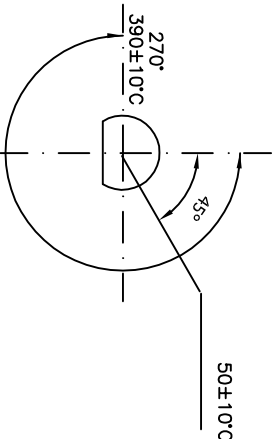

| Rotation | Torque |
|-------------|-----------|
| 0°-5° | 2 - 8 Ncm |
| 5°-270° | 2 - 8 Ncm |
| <0° / >270° | > 250 Ncm |

| | |
|------------------------|-------|
| Plastic cover colour | Black |
| Cap. insulation colour | |

APPROVALS

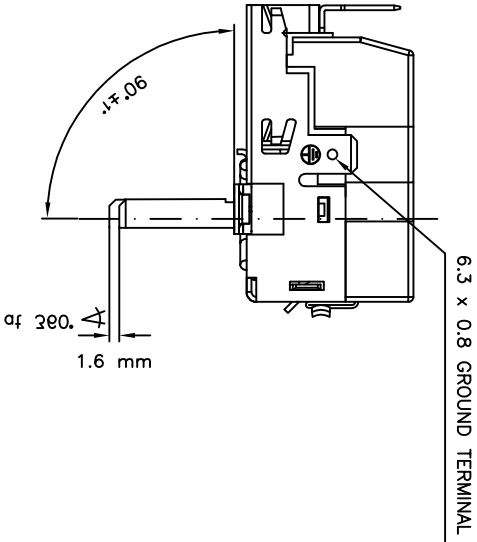

CERAMIC BOX PRINTING

T-150 EIKA Ref.

Manufacture date

NOTE: 1.-THE INDICATED VALUES ARE ACCORDING TO THE DISCONNECTION TEMPERATURES

2.-THE THERMOSTAT WITH THE BULB AT 4°C AND 0°C WILL BE DISCONNECTED

| | |
|---------------|----------|
| EIKA | 81381369 |
| CUSTOMER Ref. | |
| CUSTOMER | |

| | | | | |
|---------------------|----------------------|------|----------|---------|
| N. | Addeketaren azalpena | Data | Egilea | Adarmec |
| ELECTRIC THERMOSTAT | | N° | 81381369 | |