

BW-B SERIES

APPLICATION

- HID ballasts
- DC motor
- Battery packs
- Heating appliance
- Fractional Power Motor
- Transformer
- AC brushless motor and pump

KEY BENEFITS

- Miniature size
- Positive make and break with snap-action disc
- Competitive price
- Suitable for most impregnation processes



CERTIFICATIONS

AGENCY	STANDARD NUMBER	APPLICATION
VDE	EN60730-2-9	Motor protection
UL	UL 2111	Motor protection

MAXIMUM CONTACT RATINGS 10000 cycles


VOLTAGE	CURRENT
250 VAC	5 amperes
115 VAC	8 amperes

BW SERIES COMPARISON BW

ITEM NO	CURRENT & VOLTAGE	CASE MATERIAL	OPEN TEMP. RANGE(°C)	CASE SIZE (MM)	LEAD WIRE
BW-BCM	250V/5A	Metal	50-160	15x6.7x3.2	50-150°C 3135AWG22 70mm
BW-BCP	250V/5A	Plastic	50-130	15x7.2x3.8	50-130°C 3135AWG22 70mm

CODE SYSTEM

BW - X X X - X X °C

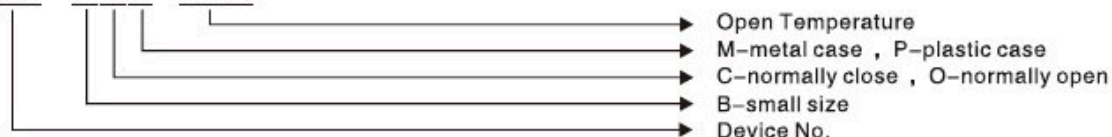

OPEN TEMP & RESET TEMP

MODEL	OPEN TEMP(°C)	RESET TEMP(°C)	MODEL	OPEN TEMP(°C)	RESET TEMP(°C)
45	45 ± 5	≥ 33	105	105 ± 5	70 ± 15
50	50 ± 5	30 ± 8	110	110 ± 5	75 ± 15
55	55 ± 5	35 ± 10	115	115 ± 5	75 ± 15
60	60 ± 5	40 ± 10	120	120 ± 5	80 ± 15
65	65 ± 5	45 ± 10	125	125 ± 5	85 ± 15
70	70 ± 5	45 ± 15	130	130 ± 5	90 ± 15
75	75 ± 5	50 ± 15	135	135 ± 5	95 ± 15
80	80 ± 5	55 ± 15	140	140 ± 5	100 ± 15
85	85 ± 5	55 ± 15	145	145 ± 5	105 ± 15
90	90 ± 5	60 ± 15	150	150 ± 5	110 ± 15
95	95 ± 5	65 ± 15	155	155 ± 5	110 ± 15
100	100 ± 5	65 ± 15	160	160 ± 5	115 ± 15

eximus[®] cs S.R.O.

IČO: 25322311, DIČ: CZ25322311, www.eximus.cz, eximus@eximus.cz

Čapkova 22
678 01 Blansko
Česká republika
Tel.: +420 - 516 432 999
+420 - 516 432 680
+420 - 516 433 701
Fax: +420 - 516 432 999